




## THD 3A~51.6A

## Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (12 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

## Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

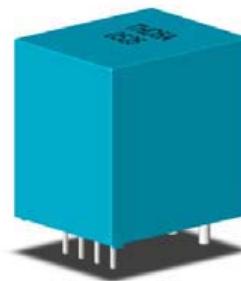


## Specifications

Parameter	Symbol	Unit	THD17.5A	THD19A	THD27A	THD27.8A	THD30.3A	THD33.4A	THD34.1A	THD51.6A
Rated Current	I <sub>fn</sub>	A DC	17.5	19.0	27.0	27.8	30.3	33.4	34.1	51.6
Saturation Current	I <sub>fsat</sub>	A DC	±44	±48	±68	±70	±76	±84	±86	±129
Linear Range	I <sub>fs</sub>	A DC	0~±44	0~±48	0~±68	0~±70	0~±76	0~±84	0~±86	0~±129
Continuous DC Current	I <sub>fc</sub>	A DC	±24	±24	±36	±36	±36	±36	±36	±36
Primary Coil Size	d	mm	1.3φ	1.3φ	1.6φ	1.6φ	1.6φ	1.6φ	1.6φ	1.6φ
Primary Coil Turns	N	T	2	2	1	1	1	1	1	1
Nominal Output Voltage	V <sub>hn</sub>	V	2 V±1.5 % @ I <sub>f</sub> =I <sub>fn</sub> ( R <sub>L</sub> =10kΩ )							
Offset Voltage	V <sub>os</sub>	mV	Within ±40 mV @ I <sub>f</sub> =0, T <sub>a</sub> =25°C							
Output Resistance	R <sub>OUT</sub>	Ω	<100Ω							
Hysteresis Error	V <sub>oh</sub>	mV	Within ±40mV @ I <sub>f</sub> =I <sub>fn</sub> →0							
Supply Voltage	V <sub>CC</sub> /V <sub>EE</sub>	V	+(7.5 -0.1/+0.5)V, -10V±1V							
Linearity	ρ	%	Within ±1% of I <sub>fn</sub>							
Consumption Current	I <sub>cc</sub>	mA	Within 12mA							
Response Time	I <sub>cc</sub>	μsec	10μsec max. @ d I <sub>f</sub> / dt = I <sub>fn</sub> / μsec							
Overshoot Response	-	%	5% max. @ d I <sub>f</sub> / dt = I <sub>fn</sub> / μsec							
Frequency bandwidth (-3dB)	f <sub>BW</sub>	Hz	DC to 50kHz							
Thermal Drift of Output	-	%/°C	Within ±0.1 %/°C @ I <sub>fn</sub>							
Thermal Drift of Zero Current Offset	-	mV/°C	Within ±3 mV/°C @ I <sub>fn</sub>							
Dielectric Strength	-	V	AC2.5KV (50/60Hz) X 60 sec							
Isolation Resistance @ 500 VDC	R <sub>IS</sub>	MΩ	>500 MΩ							
Operating Temperature	T <sub>a</sub>	°C	-15°C to + 80°C							
Storage Temperature	T <sub>s</sub>	°C	-20°C to + 85°C							
Mass	W	g	10 g							

**Appearance, dimensions and pin identification**All dimensions in mm  $\pm 0.2$ , holes  $-0, +0.2$  except otherwise noted.

→ Positive current flow direction

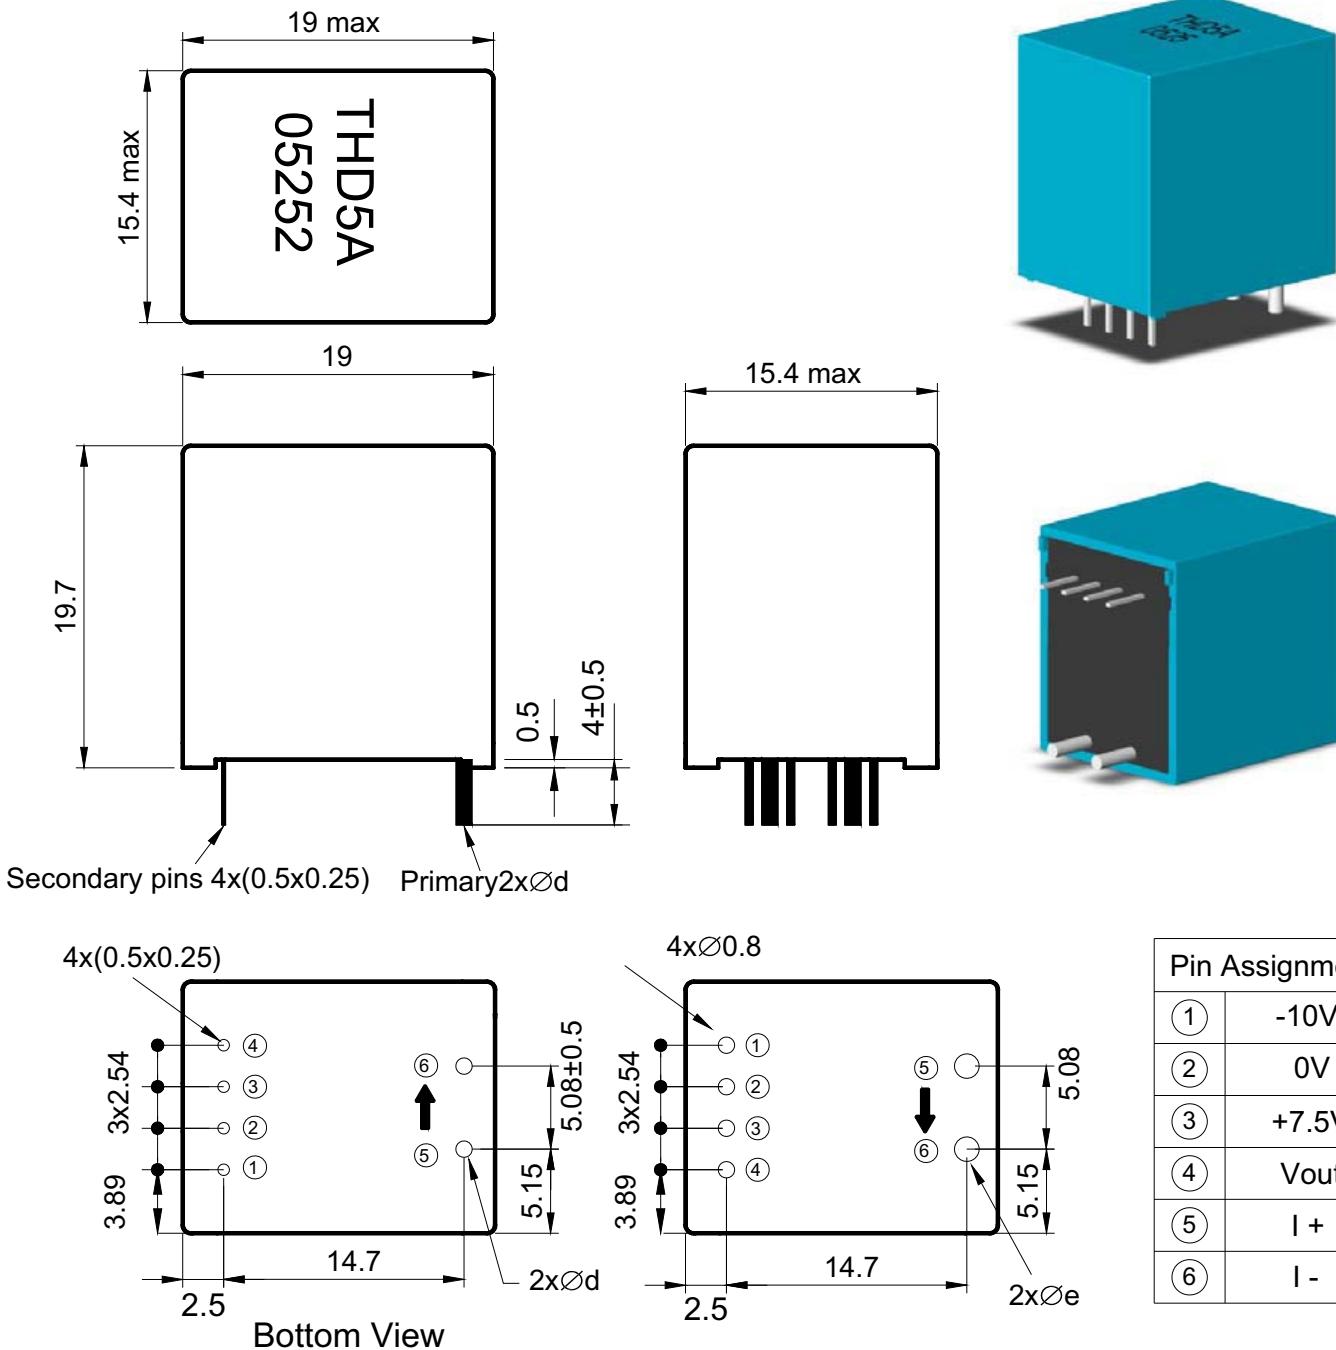

Part Number	THD3A	THD4A	THD5A	THD6A	THD7.5A	THD10A	THD12.5A	THD15A	THD18.5A	THD20A	THD25A	THD30A
d(mm)	0.6	0.8	0.8	0.8	1.0	1.2	1.2	1.3	1.3	1.3	1.6	1.6
e(mm)	1.2	1.2	1.2	1.2	1.6	1.8	1.8	2.0	2.0	2.0	2.4	2.4

Part Number	THD17.5A	THD19A	THD27A	THD27.8A	THD30.3A	THD33.4A	THD34.1A	THD51.6A
d(mm)	1.3	1.3	1.6	1.6	1.6	1.6	1.6	1.6
e(mm)	2.0	2.0	2.4	2.4	2.4	2.4	2.4	2.4