




TEGA 25A~600A-S12

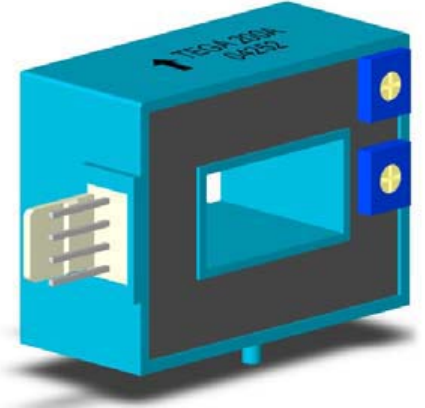

Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (12 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

Specifications


Parameter	Symbol	Unit	25A	37.5A	50A	75A	100A	150A	200A	250A	300A	470A	500A	600A
Nominal Input Current	I_{fn}	A DC	25	37.5	50	75	100	150	200	250	300	470	500	600
Linear Range	I_{fs}	A DC	$\pm I_{fn} \times 1.25$											
Output Voltage @ ($R_L=10k\Omega$, $T_a=25^\circ C$)	$I_f = I_{fn}$	V_{hn+}	$V_{hn0} + 2.0 V \pm 20mV$											
	$I_f = 0$	V_{hn0}	$2.5 V \pm 10 mV$											
	$I_f = -I_{fn}$	V_{hn-}	$V_{hn0} - 2.0 V \pm 20mV$											
Output Resistance	R_{OUT}	Ω	< 100 Ω											
Hysteresis Error	V_{oh}	mV	Within ± 10 mV @ $I_f=I_{fn} \rightarrow 0$											
Supply Voltage	V_{CC}	V	+12V $\pm 5\%$											
Output Resistance	R_{OUT}	Ω	<100 Ω											
Linearity	ρ	%	Within $\pm 1\%$ I_{fn} @ $25^\circ C$, Within $\pm 1.5\%$ @ -25~80 $^\circ C$											
Consumption Current	I_{CC}	mA	12 mA nominal, 15 mA max											
Response Time (90% V_{hn})	T_r	μsec	3 μsec max. @ $d I_f / dt = I_{fn} / \mu sec$											
Frequency bandwidth (-3dB)	f_{BW}	Hz	DC to 50kHz											
Thermal Drift of Output @ I_{fn}	-	%	Within $\pm 1\%$ @ $25^\circ C$, Within $\pm 3\%$ @ -25~80 $^\circ C$											
Thermal Drift of Zero Current Offset	-	mV/ $^\circ C$	Within ± 1 mV/ $^\circ C$ @ $T_a=-25\sim 25^\circ C$, Within ± 3 mV/ $^\circ C$ @ $T_a=25\sim 80^\circ C$											
Reference Voltage Output	V_{REF}	V	$2.5 V \pm 25 mV$											
Dielectric Strength	-	V	AC3KV X 60 sec											
Isolation Resistance @ 1000 VDC	R_{IS}	M Ω	>1000 M Ω											
Operating Temperature	T_a	$^\circ C$	-25 $^\circ C$ to 80 $^\circ C$											
Storage Temperature	T_s	$^\circ C$	-40 $^\circ C$ to 85 $^\circ C$											
Mass	W	g	50g											







Topstek Current Transducers TEGA25A .. TEGA600A-S12

Appearance, dimensions and pin identification

All dimensions in mm ± 0.1 , holes $-0, +0.2$ except otherwise noted.

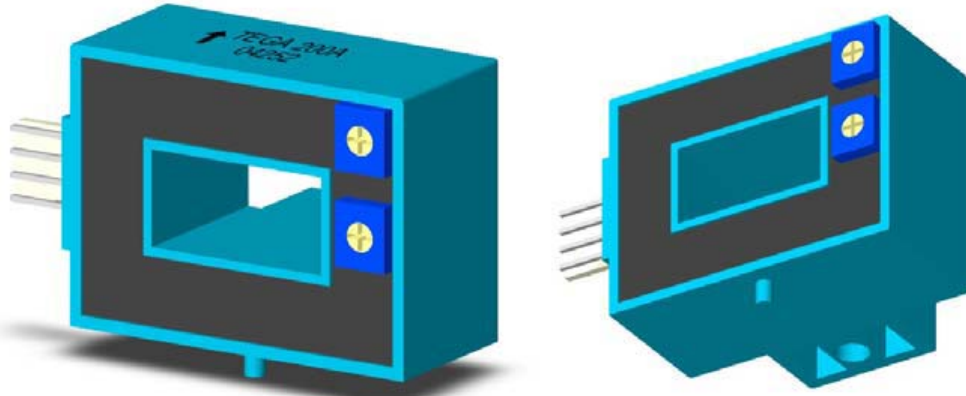

Pin Assignment	
①	+12V
②	0V
③	Vout
④	Vref(2.5V)

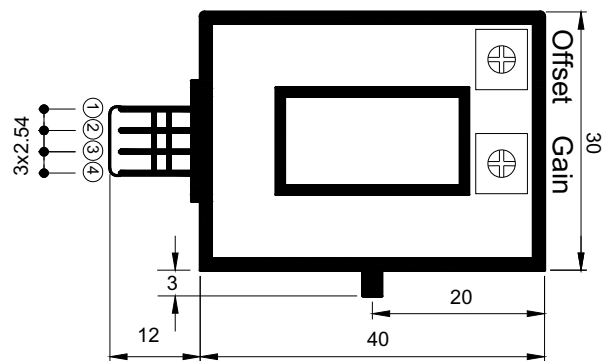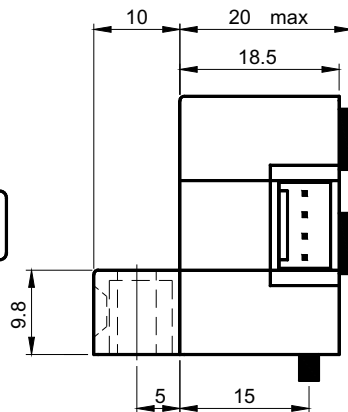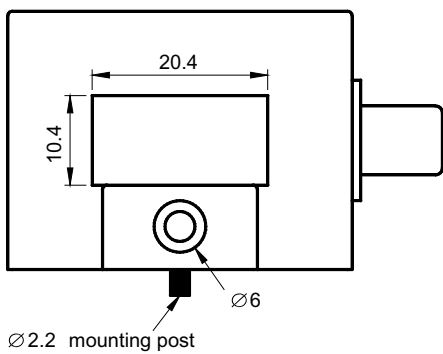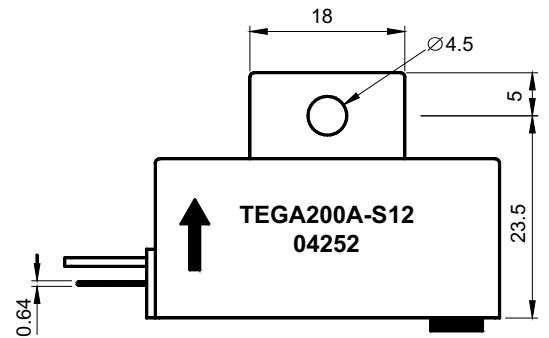

Positive current flow direction

