

# Topstek True RMS Current Transducer TU16P5A..TU16P150A-CL420

## TU16P5A~150A-CL420

### Features

- ◆ Highly reliable True RMS current measurement device
- ◆ Clamp on split core structure
- ◆ Faster response time than temperature sensing
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ VFD and SCR type waveforms current measurement
- ◆ 4-20mA True RMS current loop output
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC3KV)
- ◆ Flame-Retardant plastic case and silicone encapsulant, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ Power measurement, power panel
- ◆ True RMS AC current measurement

### Specifications

Parameter	Symbol	Unit	5A	10A	20A	30A	50A	75A	100A	150A
Full Scale Input Current	$I_{PN}$	$A_{RMS}$	5	10	20	30	50	75	100	150
Max Primary Current Peak	$I_{PMax}$	A	±30	±60	±120	±180	±300	±450	±450	±450
Input Crest Factor (Peak/Average Ratio)	CF		6	6	6	6	6	6	4.5	3
Current Output Protocol	$I_{OUT}$	mA	4-20 mA Current Loop, 4mA@ $I_P=0A$ , 20mA@ $I_P = I_{PN}$							
Output Offset Current	$I_{OS}$	mA	+4 mA							
Over-Scale Output Current	$I_{OL}$	mA	<+23 mA							
Load Resistance	$R_L$	$\Omega$	<300 $\Omega$							
Supply Voltage	$V_{CC}$	V	+20V .. +32V							
Accuracy @ $I_{PN}$		%	Within ±1% of $I_{PN}$ @25°C(excluding offset)							
Linearity	$\rho$	%	Within ±1% of $I_{PN}$							
Consumption Current	$I_{CC}$	mA	4-20 mA (= $I_{OUT}$ )							
Response Time (90% $I_{PN}$ Step)	$T_r$	$\mu$ sec	<200 msec							
Frequency bandwidth (±1dB)	$f_{BW}$	Hz	20 to 6kHz							
Thermal Drift of Output	-	%/°C	Within ±0.1 %/°C @ $I_{PN}$							
Thermal Drift of Zero Current Offset	-	$\mu A/°C$	< ±3 $\mu A/°C$ (0-60°C), < ±6 $\mu A/°C$ (-40 .. 70°C)							
Dielectric Strength	-	V	AC3KV X 60 sec							
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>1000 M $\Omega$							
Operating Temperature	$T_a$	°C	-40°C to 70°C							
Storage Temperature	$T_s$	°C	-45°C to 85°C							
Mass	W	g	80 g							









### Options

- ◆ Plastic case material:  
UL94V0 Nylon 66 (black) standard and PC(blue) option
- ◆ Operating temperature range:  
70°C standard and option 85°C available
- ◆ Connector type: specify -E or -M. If other types of connector required, please contact factory for other possibilities.  
-M: UL 1017 AWG22, Length:150±10mm with Molex 5045 type female connector (2.54mm pitch)  
-Y: UL 1017 AWG18 Wire, Length:3000±50mm, Two Y4.3 Terminals with PVC Tube

# Topstek True RMS Current Transducer TU16P5A..TU16P150A-CL420


## Appearance, dimensions and pin identification of TU16P-CL420

All dimensions in mm  $\pm 0.2$ , holes  $-0, +0.2$  except otherwise noted.

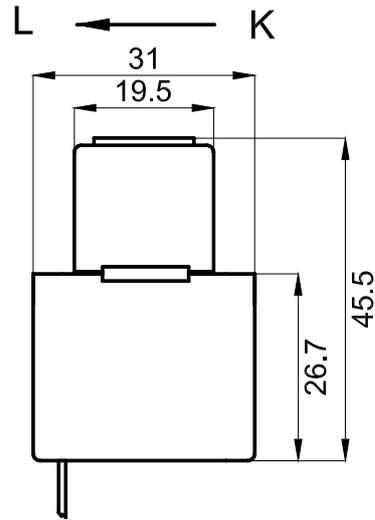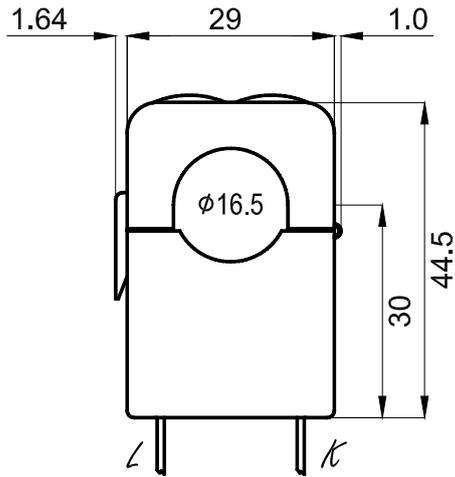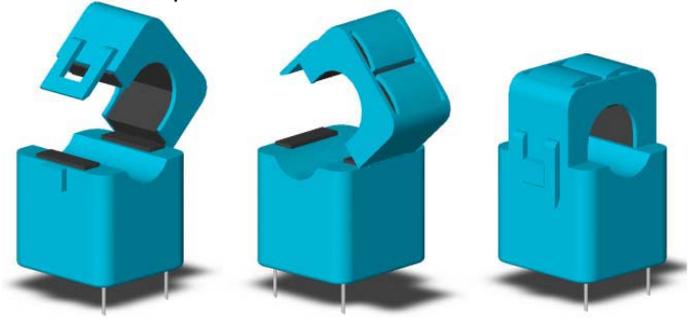


k (white) : +24V  
l (black) : Iout

Standard Terminal

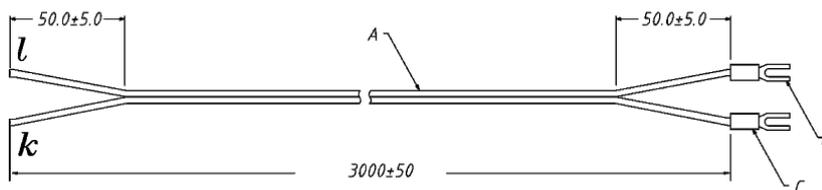

Option Y Terminal

### Application Connection

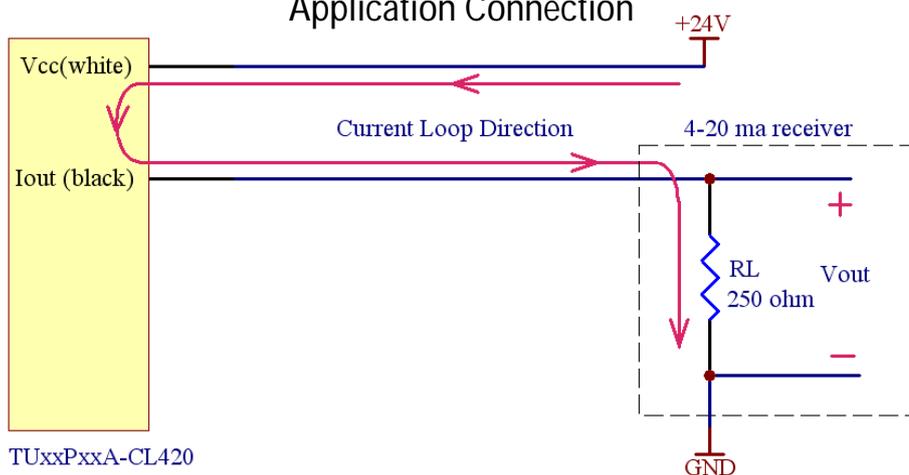

TUxxPxxA-CL420

